

Modicon M221 logic controllers

Catalog

January 2018



Quick access to Product information

Select your Catalog, your Training

Digi-Cat

The complete digital catalog for industrial automation



Makes your choice easy every day, everywhere!



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalog, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:

<http://digi-cat.schneider-electric.com/download.html>




Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

then click on

Find your training center

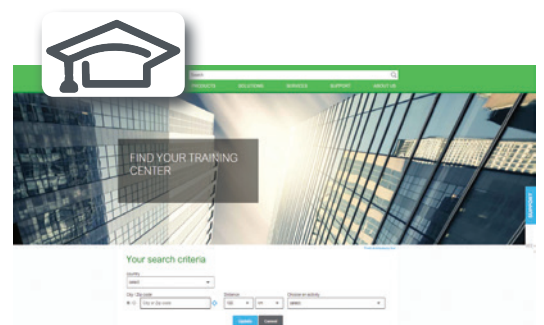

Life Is On

Schneider
Electric

General contents

Modicon™ M221 and Modicon™ M221 Book logic controllers

■ General presentation.....	Page 2
■ <i>Selection guide for Modicon™ M221 and Modicon™ M221 Book logic controllers.....</i>	<i>Pages 6 and 7</i>
■ Presentation	
- Applications, key features.....	Page 8
- Embedded communication, Embedded functions.....	Page 9
- Options: memory card, cartridges.....	Page 9
- Remote graphic display	Pages 10 and 11
- Communication via modem and router	Page 12
- I/O extensions with Modicon TM3 expansion modules	Page 13
- Control architecture for standalone machines.....	Page 14
- Communication	Page 15
■ Description	
- Modicon M221 logic controllers	Page 16
- Modicon M221 Book logic controllers	Page 17
- TMH2GDB Remote graphic display.....	Page 16
■ References	
- Modicon M221 logic controllers	Page 18
- Modicon M221 Book logic controllers	Page 19
- Remote graphic display, Options	Page 20
- Options, separate parts, software, cordsets.....	Page 21

Communication bus

■ Serial links (Modbus protocols, character mode)	
- Presentation, description.....	Page 22
- References	Page 23
■ Industrial Ethernet	
- General.....	Page 24
- Main equipment supported	Page 25
- Web server	Page 25
- Ethernet services Description	Page 26
- Transparent Ready class and Functions.....	Page 27
- Ethernet Ports (logic controllers and Ethernet switch module).....	Page 27
- Architecture	Page 28
- References	Page 29

Compatibility

■ Compatibility of Modicon TM2 expansion modules with Modicon M221 logic controllers	Page 32
--	---------

Products reference index	Page 33
--------------------------------	---------

Maximize your business and machine performance with MachineStruxure




Machine builders like you are constantly looking for new ways to design and build more innovative machines in less time and at lower cost. MachineStruxure™ can help.


The NEXT generation of MachineStruxure is a complete machine automation solution that provides flexible and scalable machine control, ready-to-use architectures, efficient engineering solutions, and comprehensive customization and engineering support services. It can help you meet your challenges for improved efficiency and greater productivity, as well as allow you to deliver higher added value to your customers throughout the entire machine life cycle.

Ready-to-use architectures and function blocks

Tested, Validated, and Documented Architectures (TVDA) are just one of the ways we help you reduce design time. Whether your machines are simple or complex, Application Function Blocks (AFBs) make system design fast and easy.

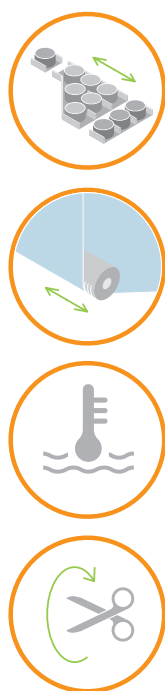

Application Function Blocks (AFB)

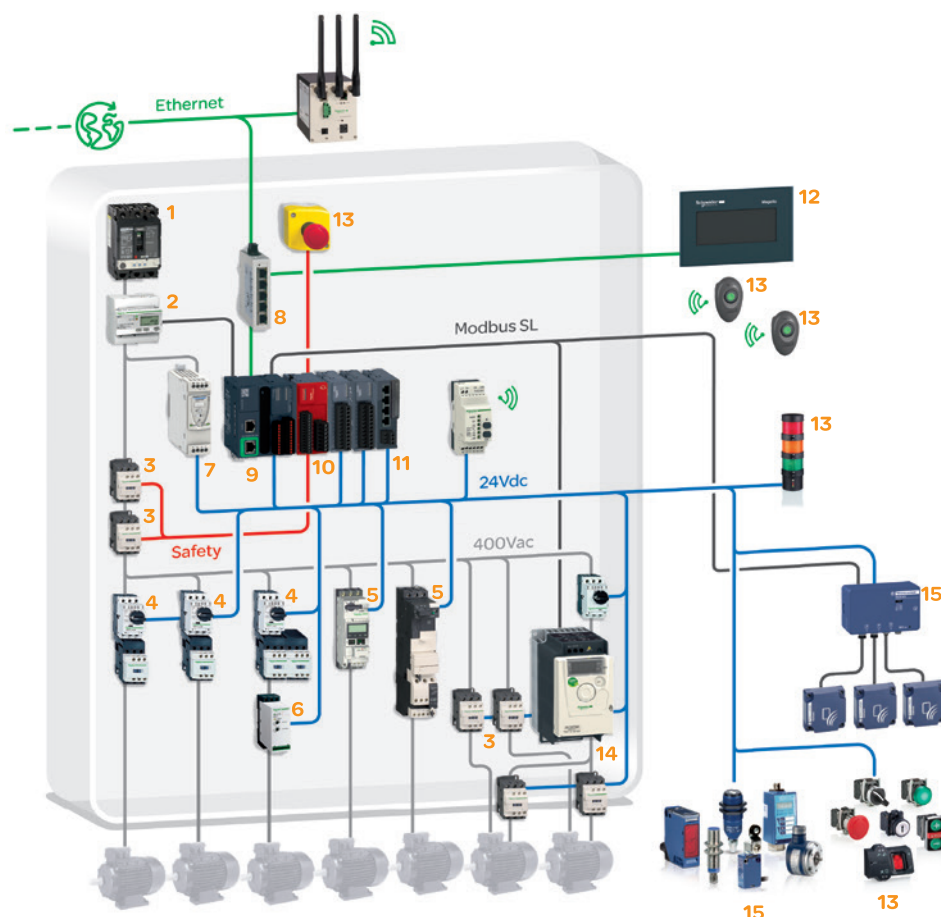

- | | |
|---|---|
| 1 POWERPACT circuit breaker | 10 Modicon TM3 safety module, Modicon |
| 2 Energy meter Acti9 iEM310 iEM310 | TM3 digital/analog I/O modules |
| 3 TeSys D contactor | 11 Modicon TM3 TeSys motor starter |
| 4 TeSys GV2P motor circuit-breaker | module |
| 5 TeSys U starter-controller | 12 Magelis display |
| 6 Multi9 circuit-breaker C60N | 13 Harmony signalling and control devices |
| 7 Phaseo power supply 24 V \square | 14 Altivar 312 variable speed drive |
| 8 Ethernet switch (unmanaged) | 15 OsiSense: limit switches and inductive |
| 9 Modicon M221 Book logic controller | sensors |

Fastest and smallest logic controllers on the market

Flexible and scalable machine control



With the new range of Modicon™ logic controllers, the next generation of MachineStruxure provides flexible and scalable machine control. Ethernet connectivity, USB port for programming, and an embedded web server: it's all included.



Modicon M221: the small yet powerful logic controller for hardwired solutions

Everything you need is embedded

The Modicon M221 offers best-in-class performance. Available also in book format, the Modicon M221 requires minimal installation and offers tremendous versatility.

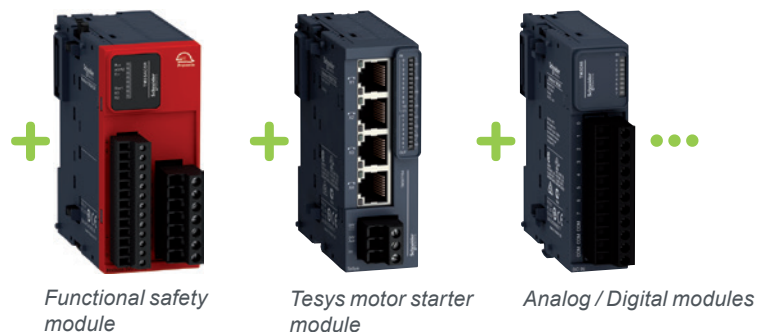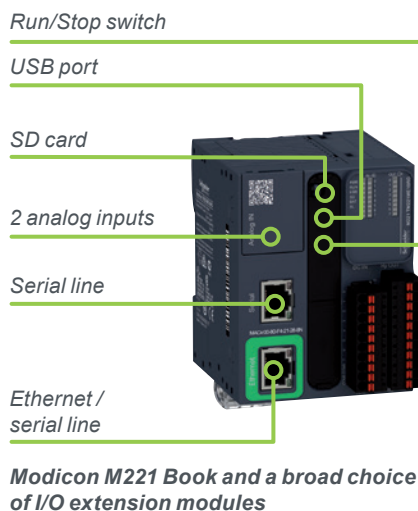

- > SD card, Run/Stop switch, USB port, 2 analog inputs, serial line, Ethernet and serial line, cartridge extension (on standard version): it's all **embedded**.
- > Thanks to its high degree of **flexibility**, it's very easy to add additional modules (safety modules, Tesys motor starter module, extensive line of analog and digital modules, ...) - and still keep everything in **just one configuration**

Modicon M221: the small yet powerful logic controller for hardwired solutions




SoMachine simplifies every step in the design and commissioning of your machines


Intuitive machine programming with SoMachine

SoMachine® is the universal programming software for machines automated by MachineStruxure controllers. Simple navigation that requires only fewer clicks delivers a more efficient engineering process.


- > In order to reduce complexity we offer SoMachine Basic, a simplified engineering tool for the new controller Modicon M221.
- > All programming, visualization, and commissioning are handled in just one intuitive tool that is available as a free download.
- > No training required

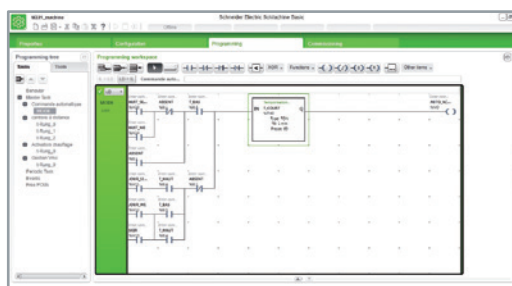

Programming

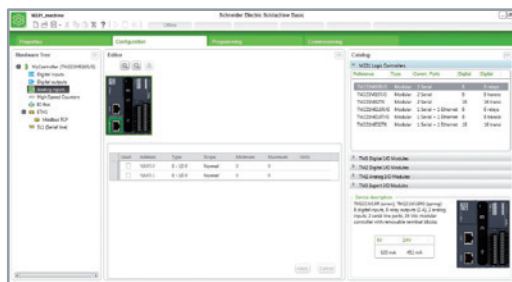

Configuration

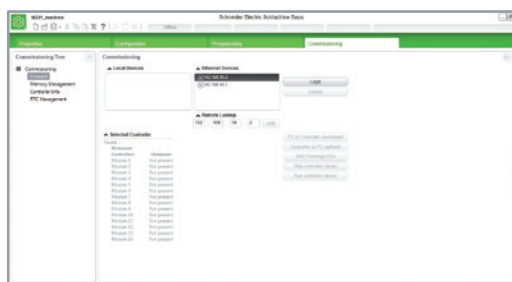

Commissioning

Connected everywhere

For simplified maintenance, commissioning, and uploads/downloads, simply connect anytime, anywhere.

- > Modem and router offer
- > QRcode on the front of the controller





Customization and services

Our experts help you every step of the way, from perfecting machine design to on-site services of the finished machine. Global support, 24/7 hotline services, and replacement parts centers around the world enable you to deliver superior customer support and satisfaction.

Achieve benchmark performance
while increasing profitability



Modicon M221 and M221 Book logic controllers

Applications		Control of simple machines						Control of simple machines		
										
Supply voltage		100-240 V ~	24 V ~	24 V ~	100-240 V ~	24 V ~	24 V ~	24 V ~	24 V ~	24 V ~
Inputs/outputs	■ Logic inputs/outputs	16 logic I/O						40 logic I/O		
	□ No. and type of inputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs
	□ No. and type of outputs	7 relay outputs	7 source transistor outputs, inc. 2 high-speed outputs	7 sink transistor outputs, inc. 2 high-speed outputs	10 relay outputs	10 source transistor outputs, inc. 2 high-speed outputs	10 sink transistor outputs, inc. 2 high-speed outputs	16 relay outputs	16 source transistor outputs, inc. 2 high-speed outputs	16 sink transistor outputs, inc. 4 high-speed outputs
	□ Connection of the logic I/O	On removable screw terminal block						On removable screw terminal block or spring terminal block (1)		
		2 x 0...10 V analog inputs						2 x 0...10 V analog inputs		
		On dedicated removable connector						On dedicated removable connector		
I/O extension		Max. number of I/O expansion modules that can be connected /with bus expansion modules						Max. number of I/O expansion modules that can be connected /with bus expansion modules		
I/O extension		□ 7 Modicon TM3 expansion modules, along with limited number of outputs. □ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver), along with limited number of outputs. □ Possible use of Modicon TM2 expansion modules with restrictions.						□ 7 Modicon TM3 expansion modules, along with limited number of outputs. □ 14 Modicon TM3 expansion modules with the use of bus expansion modules (transmitter and receiver), along with limited number of outputs. □ Possible use of Modicon TM2 expansion modules with restrictions.		
Embedded communication	Ethernet link	1 Ethernet port on TM221CE... controllers: Modbus TCP communication (client & server), slave Modbus TCP, DHCP Client dynamic configuration, programming, downloading, monitoring, EtherNet/IP adapter						1 Ethernet port on TM221ME... controllers: Modbus TCP communication (client & server), slave Modbus TCP, DHCP Client dynamic configuration, programming, downloading, monitoring, EtherNet/IP adapter		
	Serial link	1 serial link port (RJ 45 connector) RS 232/RS 485 with + 5 V supply						1 serial link port (RJ 45 connector) RS 232/RS 485 with + 5V supply 1 additional serial link port on TM221M... controllers (RJ 45) RS 485		
Embedded functions	Process control	PID						PID		
	Counting	Up to 4 high-speed counter inputs (HSC), 100 kHz frequency						Up to 4 high-speed counter inputs (HSC), 100 kHz frequency		
	Position control	Position control (PTO), with trapezoidal profile and S curve able to control either: □ 2 axes in "pulse direction" (P/D) mode □ 1 axis in CW/CCW mode						Position control (PTO), with trapezoidal profile and S curve able to control either: □ 2 axes in "pulse direction" (P/D) mode □ 1 axis in CW/CCW mode		
Format	W x H x D	3 controller sizes: 95 x 90 x 70 mm 3.74 x 3.54 x 2.75 in.						1 size only: 70 x 90 x 70 mm 2.75 x 3.54 x 2.75 in.		
	Options	□ 3 analog I/O expansion cartridges □ 1 additional serial link communication cartridge □ 3 application cartridges - for control of hoisting applications - for control of packaging applications - for control of conveying applications						—		
		Number of cartridge slots						—		
		■ Display unit						—		
Mounting		TMH2GDB remote graphic display: visualization and monitoring Mounting on ┐ symmetrical rail or panel with specific mounting kit TMAM2						TMH2GDB remote graphic display: visualization and monitoring Mounting on ┐ symmetrical rail or panel with specific mounting kit TMAM2		
Software programming		With SoMachine Basic software						With SoMachine Basic software		
Logic controller type	Controllers without Ethernet port	Modicon M221						Modicon M221 Book		
	Controllers with embedded Ethernet port	TM221C16R	TM221C16T	TM221C16U	TM221C24R	TM221C24T	TM221C24U	TM221C40R	TM221C40T	TM221C40U
		TM221CE16R	TM221CE16T	TM221CE16U	TM221CE24R	TM221CE24T	TM221CE24U	TM221CE40R	TM221CE40T	TM221CE40U
Pages		18						19		

(1) Spring terminal block on references ending in the letter G.

Modicon M221 and M221 Book logic controllers

General presentation

Compatibility of offers

Modicon M221 and M221 Book logic controllers

- > Modicon TM3 expansion modules
- > Modicon TM2 expansion modules
- > SoMachine Basic software



16 I/O channels



24 I/O channels



40 I/O channels

Modicon M221 logic controllers (standard format)



16 I/O channels



32 I/O channels

Modicon M221 Book logic controllers

Presentation

Applications

Modicon **M221** and **M221 Book** logic controllers are designed for simple machines. They can optimize the size of wall-mounted and floor-standing control system enclosures due to their compact dimensions.

- The controllers are available in 2 formats:
 - Modicon **M221** controllers (TM221C●●●● references) offer excellent connection capacity and customization options without increasing the controller size, using I/O, communication, or application cartridges.
 - Modicon **M221 Book** controllers (TM221M●●● references) offer very small dimensions and a wide choice of connections.
- M221 and M221 Book controllers have an embedded Ethernet port meaning they can be easily integrated in control system architectures, for remote control and maintenance of machines using applications for smartphones, tablets, and PCs.
- The wealth of functions embedded in M221 and M221 Book controllers minimizes the cost of the machine:
 - Functions embedded in the controller: Modbus serial link, USB port dedicated to programming, and simple position control functions (high speed counters and pulse train outputs trapezoidal and S-curve profile)
 - Functions embedded in Modicon TM3 extensions: functional safety modules, motor-starter control module, and remote expansion system
 - Functions embedded in the dedicated display unit
- The application is created quickly thanks to the intuitive nature of the SoMachine Basic programming software, which also has embedded configuration of the display unit and extensions, including the functional safety modules. This software environment makes it easy to retrieve Twido range applications, maximizing use of the investment already made. Applications can thus be easily ported to any of the Modicon logic controllers: M241, M251, and M258.

Main functions

Modicon TM221C●●●	Modicon TM221M●●●
w x h x d (mm/in.)	
□ 16 I/O: 95 x 90 x 70 / 3.74 x 3.54 x 2.75 □ 24 I/O: 110 x 90 x 70 / 4.33 x 3.54 x 2.75 □ 40 I/O: 163 x 90 x 70 / 6.41 x 3.54 x 2.75	
Supply voltage	
24 V $\overline{\text{---}}$ or 100..240 V \sim 50/60 Hz	24 V $\overline{\text{---}}$
Connection of the embedded I/O	
On removable screw terminal blocks at intervals of 5.08 mm (0.20 in.) 24 V/0.25 A power supply provided by the controller for sensor inputs on TM221C●●R models	16 I/O: On removable screw or spring terminal blocks at intervals of 3.81 mm (0.15 in.) 32 I/O: On HE10 connectors with HE 10 cables/bare wires or Telefast ABE7 connection sub-bases (1)
Analog inputs	
2 embedded inputs on each TM221M●●● and TM221C●●● controller	
Embedded Ethernet communication	
Yes on TM221CE●●	Yes on TM221ME●●
Serial link	
1 embedded link	1 or 2 embedded links
Cartridges	
1 slot for 1 or 2 cartridges: □ I/O cartridge (analog inputs or outputs, temperature inputs) □ communication cartridge (serial link) or application cartridges (hoisting, conveying, and packaging)	—

Hardware characteristics

M221 and M221 Book controllers each have an embedded:

- Run/Stop switch
- slot for an industrial SD memory card
- QR code for direct access to its technical documentation

(1) Telefast Modicon ABE7 pre-wired system to be ordered separately. Refer to the "Telefast pre-wiring system: Modicon ABE7 and Modicon ABE9" catalog or our website www.schneider-electric.com.



Example of a QR code:
QR code for access to the TM221M16R logic controller technical documentation

Modicon M221 and M221 Book logic controllers

General presentation, options for Modicon M221 and M221 Book logic controllers



SoMachine Basic software

TMASD1 industrial SD memory card



M221



M221 Book



Analog I/O cartridges



Communication cartridge



Application cartridges



M221

Presentation

Embedded communication (see page 15)

M221 and M221 Book logic controllers have three types of integrated communication port:

- ☐ Ethernet
- ☐ RS 232/RS 485 serial link
- ☐ USB mini-B programming port

Embedded functions

Each Modicon M221 and M221 Book logic controller has the following integrated functions:

- Analog (PID control)
- Counting: Up to 4 high speed counters (HSC), 100 kHz frequency
- Controllers with transistor logic outputs (source or sink) are equipped with 2 or 4 high speed counters (1) supporting pulse generation functions.
- Position control (PTO), with trapezoidal and S-curve profile able to control either:
 - 2 or 4 axes in pulse direction (P/D) mode
 - 1 or 2 axes in CW/CCW mode
 These outputs can be associated with event-triggered inputs to feed back homing and capture information. A "Motiontask" function block (one per axis) associated with a command table can be used to program and preview intuitively all the movements of an axis in the SoMachine Basic software.
- Pulse width modulation (PWM)
- Pulse generator (PLS)
- Frequency generator (FREQGEN)

Processing power

- ☐ Execution speed: 0.2 μ s/Boolean instruction
- ☐ Program: 10 Boolean Kinstructions
- ☐ Number of words: 8,000. Number of internal bits: 1,024
- ☐ RAM: 640 K (256 K for internal variables and 256 K for application and client data)
- ☐ Flash memory: 2 MB (including 256 K for backing up the client application and data in the event of a power outage)

Programming

Modicon M221 and M221 Book logic controllers are programmed using SoMachine Basic software. [Please consult our website: www.schneider-electric.com](http://www.schneider-electric.com).

SoMachine Basic is an integral component of the SoMachine software.

SoMachine Basic is available on our website: www.schneider-electric.com.

Options

Memory card

The **TMASD1** industrial SD memory card, with 256 MB capacity, is available for Modicon M221 and M221 Book logic controllers. It is used for:

- ☐ backing up and transferring applications
- ☐ loading firmware
- ☐ duplicating applications between controllers
- ☐ data logging

Cartridges

One or two cartridges can be inserted on the front of TM221C●●● controllers without increasing the dimensions.


Three types of cartridge are offered:

- Analog I/O cartridges
 - ☐ **TMC2AI2** for 2 analog inputs, which can be configured as voltage or current
 - ☐ **TMC2AQ2V** for 2 voltage analog outputs
 - ☐ **TMC2AQ2C** for 2 current analog outputs
 - ☐ **TMC2TI2** for 2 temperature inputs
- Communication cartridge
 - ☐ **TMC2SL1** providing additional serial link port terminals for connection via a printer, barcode reader, etc.
- Application cartridges
 - ☐ **TMC2HOIS01** for hoisting applications with two dedicated analog inputs for controlling a load cell
 - ☐ **TMC2PACK01** for packaging applications with two dedicated analog inputs for controlling the temperature on a packaging machine
 - ☐ **TMC2CONV01** for conveyor system applications with a serial link
 Use of an application cartridge provides direct access to application examples via the SoMachine Basic software.

(1) 4 high-speed outputs on TM221C●40U, 2 high-speed outputs on TM221●●16T, TM221●24T, TM221●40T, TM221●16U, TM221C●24U.

Modicon M221 and M221 Book logic controllers

Remote graphic display unit for Modicon M221 and M221 Book logic controllers

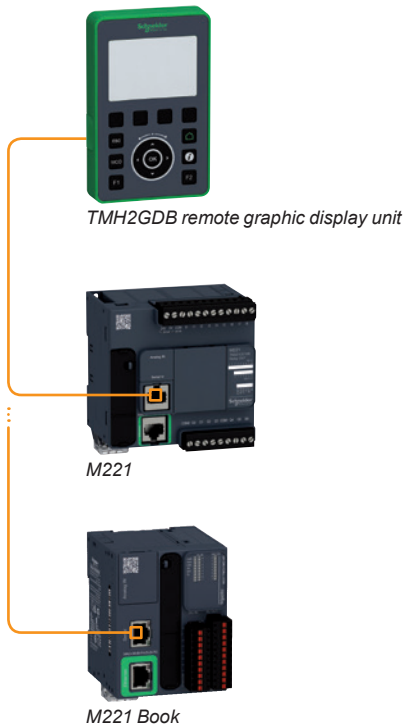

TMH2GDB remote graphic display unit

Presentation

The **TMH2GDB** remote graphic display unit is an HMI dedicated to M221 and M221 Book logic controllers. It is mounted on the front panel of a wall-mounted or floor-standing enclosure (degree of protection IP 65) or, using mounting brackets, at the back of an enclosure on a panel or symmetrical rail.

The **TMH2GDB** display unit is ready to use: the main application parameters can be accessed, with no prior programming, as soon as it is connected to the logic controller. Customized dialog pages can, however, be easily created using predefined templates in the SoMachine Basic software dedicated to Modicon M221 and M221 Book logic controllers.

The **TMH2GDB** remote graphic display unit is a multifunction display unit that runs alongside your machine throughout its life cycle:

- During debugging: reading the states and values of variables and providing complete diagnostics of the controller configuration
- During installation: options for setting the time and configuring the communication ports
- During runtime: an operator interface created in the SoMachine Basic software can be used to (for example):
 - display information in the form of text, values, bargraphs, or gages
 - perform machine control actions
 - enter or modify data
 - customize buttons on the front panel
- During maintenance: the page displaying alarm messages is permanently accessible by pressing a single key. Alarm messages are stored and time-tagged in a page of the log. An icon, which is always visible, flags up the presence of at least one alarm message. Access to each page and modification of its values can be protected by a password.

Main characteristics

- Backlit monochrome STN LCD 60 x 40 mm (2.36 x 1.57 in.)
- 5 lines of 20 to 35 characters, depending on the type of page
- Title block at the top of the page
- Title block at the bottom of the page
- 10 languages available: English, French, Czech, German, Italian, Japanese, Portuguese, Simplified Chinese, Spanish, and Turkish
- Up to 4 customizable service keys
- 100 HMI pages maximum
- Dimensions on the front panel of the machine (w x h x d): 80 x 126 x 19.2 mm (3.15 x 4.96 x 0.75 in)

Conformity

- CE, cULus Listing Mark

Environmental characteristics

- Ambient operating temperature: -15...+ 50 °C (5...122 °F)

Power supply characteristics

- 5 V \pm (200 mA) supplied directly by the controller
- Max. consumption: 1 W

Modicon M221 and M221 Book logic controllers

Remote graphic display unit for Modicon M221 and M221 Book logic controllers

	Controller Info	10/02/2012 02:57:11
Device name	TM221CE24T	
Firmware version	0.3.9.1	
LastMAST cycle	0,134 ms	
Min. MAST cycle	0,134 ms	
Max. MAST cycle	0,159 ms	
Alarm		Back

Debugging: Controller information

	Ethernet	10/02/2012 02:57:47
IP Mode	0	
IP address	85.21.1.24	
Mask	255.255.255.0	
Gateway	0.0.0.0	
Device name	M221	
Apply	Edit	Refresh Cancel

Debugging: Configuring communication

Alarm	Monitoring	26/11/2014 10:38:24
Temperature 1	23	
Temperature 2	24	
Heating	1	
Cooling	0	
Auto/Manu	1	
Edit	Alarm	menu

HMI: Monitoring

Alarm	Controls	26/11/2014 10:38:40
Auto mode status		
Auto mode selected		
Oven is heating		
Cooling system is OFF		
On	Off	Menu Alarm

HMI: Control panel

	WATER SUPPLY	14/09/2015 23:26:13
3	m	
0	10	
9	m3	
0	10	
Edit1	Edit2	Alarm Home

HMI: Bargraph

	Temperature	10/02/2012 02:59:14
20	25	30
22		°C
Alarm	menu	set

HMI: Gage

Alarm	Alarm History	17/09/2015 07:44:18
TANK EMPTY	17/09/2015 07:43:55	
Conveyor blocked	17/09/2015 07:43:36	
LOW BATTERY	17/09/2015 07:41:37	
TANK EMPTY	17/09/2015 07:41:00	
Alarm	Delete	Back

HMI: Alarm display

Examples of screens

TMH2GDB remote graphic display unit (continued)

Installation and setup

The **TMH2GDB** remote graphic display unit is mounted in a 22 mm (0.87 in.) diameter hole and is connected to the SL or SL1 serial link on Modicon M221 and M221 Book logic controllers with the **XBTZ9980** and **VW3A1104R10** cable, which also supplies it with power (no other Modbus slave equipment must be connected on this link) (1).

The debug screens, including those for setting the time and configuring the communication ports, are already configured and available as soon as the display unit is connected to the logic controller (2).

The HMI (runtime) pages and alarm pages are created and configured very easily in the SoMachine Basic programming software (3), from predefined pages:

- "Alarm display" template
- "Menu" template
- "Monitoring" template
- "Control panel" template
- "Bargraph" template (1 or 2 bars)
- "Gage" template

These pages constitute part of the controller application. They are transferred to and stored in the M221 and M221 Book logic controller memory, no transfer is necessary between the PC and the **TMH2GDB** graphic display unit. The latter is operational as soon as it is connected to the serial port on the logic controller.

The Home page can be selected by programming. Each HMI and alarm page can be displayed by navigating the front panel using the keys or called by a program. Alarm pages can also be displayed on a red background.

The HMI pages can be created in several languages, the language displayed on the graphic display unit can then be selected by the operator in the display configuration menu.


(1) Neither the serial link on the TMC2SL1 cartridge, nor the SL2 embedded serial link, can be used to connect the graphic display unit.

(2) When the controller has no application program, only the product reference and the controller firmware version are accessible. The controller firmware version must be V1.3 or later.


(3) Possible from version V1.3 of SoMachine Basic.

Modicon M221 and M221 Book logic controllers

Communication via modem and router

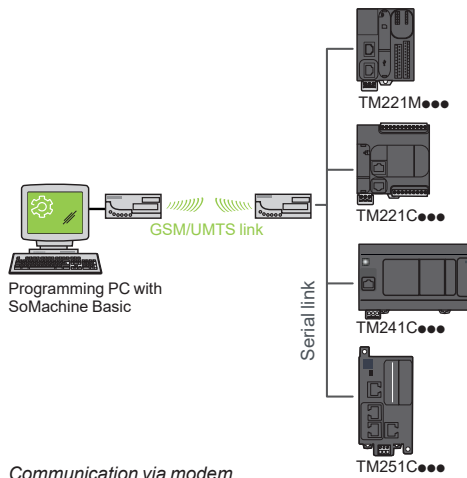

Communication via modem

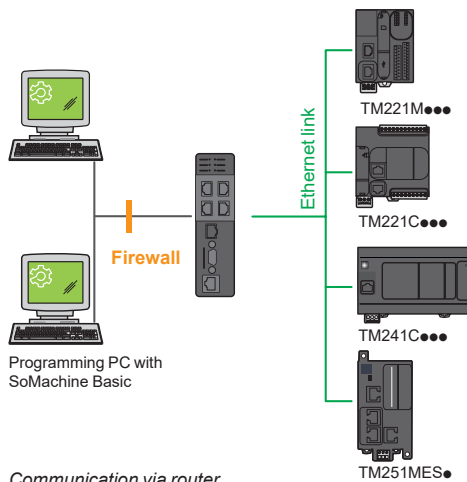

Communication via router

Communication via modem and router

The communication via modem and router offer is dedicated to the following applications:

- Synchronization between remote machines; direct data exchange between controllers
- Remote maintenance; access to the controller via the SoMachine Basic programming software
- Remote control and monitoring of machines; receipt of information and sending commands on GSM/UMTS phone (1)

This offer comprises a **Schneider Electric** modem, a GSM/UMTS modem, and an **eWon** VPN router.

For modem and router, please consult our website www.schneider-electric.com.

(1) Global System Mobile (2G)/Universal Mobile Telecommunications System (3G)

Modicon M221 and M221 Book logic controllers

I/O extensions with Modicon TM3 expansion modules

I/O extensions with Modicon TM3 modules

Modicon TM3 expansion modules


Please consult our website: www.schneider-electric.com

The capacity of M221 and M221 Book logic controllers can be enhanced with the Modicon TM3 expansion module offer:

- Digital I/O modules that can be used to create configurations with up to 488 digital I/O. These modules are available with the same connections as the controllers.
- Analog I/O modules that can be used to create configurations with up to 114 analog I/O and are designed to receive, amongst other things, position, temperature, and speed sensor signals. They are also capable of controlling variable speed drives or any other device equipped with a current or voltage input.
- Expert module for control of TeSys motor-starters, connected with RJ 45 cables to simplify wiring up the control section.
- Functional safety modules that simplify wiring and can be configured in the SoMachine Basic software.

In addition, the TM3 expansion system is flexible due to the possibility of remotely locating some of the TM3 modules in the enclosure or another cabinet, up to 5 meters (16.404 ft) away, using a bus expansion system.

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241, and M251 logic controllers, meaning that the controller model can be upgraded without changing extension.

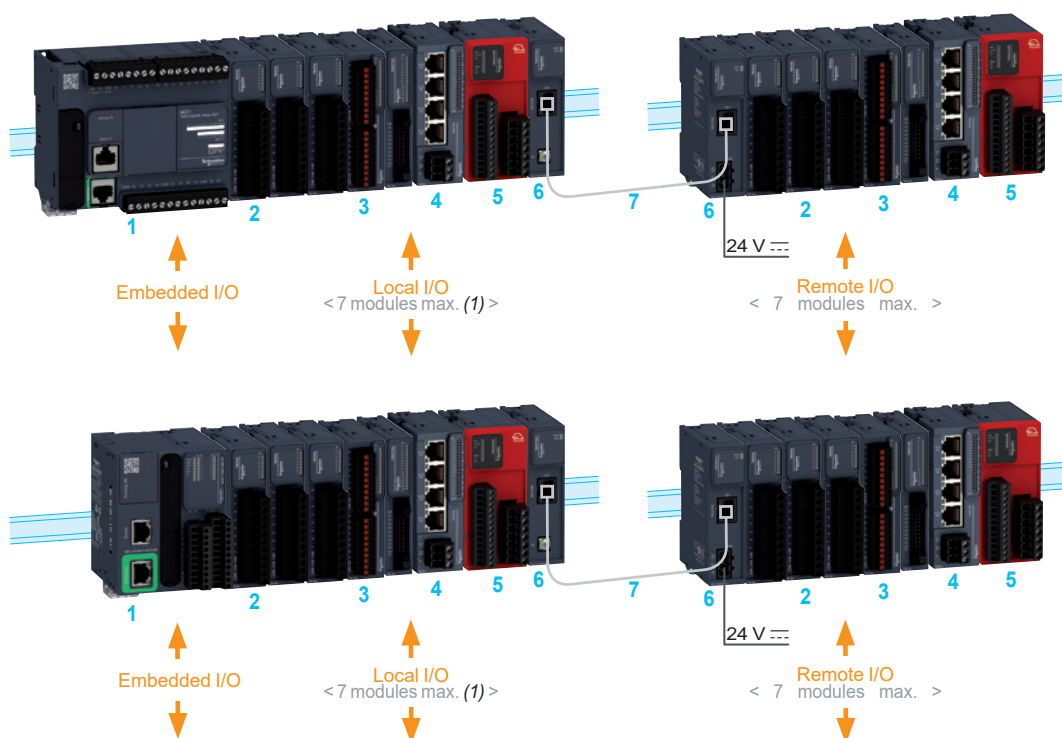

- 1 Modicon M221/M221 Book logic controller
- 2 Modicon TM3 digital I/O modules
- 3 Modicon TM3 analog I/O modules (2)
- 4 Modicon TM3 expert module: control of TeSys motor-starters
- 5 Modicon TM3 functional safety modules
- 6 Modicon TM3 bus expansion modules (transmitter and receiver)
- 7 TM3 bus expansion cable

(1) Depending on the type of TM3 module used.

(2) Compatibility of expansion module offers: the majority of Modicon TM2 expansion modules can be used with M221 and M221 Book logic controllers. Nonetheless, adding a Modicon TM2 expansion module to a configuration can increase the expansion module execution times by as much as a few milliseconds. The compatibility between Modicon TM2 expansion modules and each M221 or M221 Book logic controller is specified on page 32.

Modicon M221 and M221 Book logic controllers


Control architecture

Control architecture for standalone machines


Typical applications: repetitive machines

- Packaging: recycling machines
- Textile-clothing machines
- Commercial equipment: automatic wash units, advertising hoardings, etc.
- Construction/service sector: access and entry control for automated systems
- Other sectors: woodworking, agriculture, fish farming, incubators, swimming pools, etc.

■ M221 (TM221C●●●●) controllers

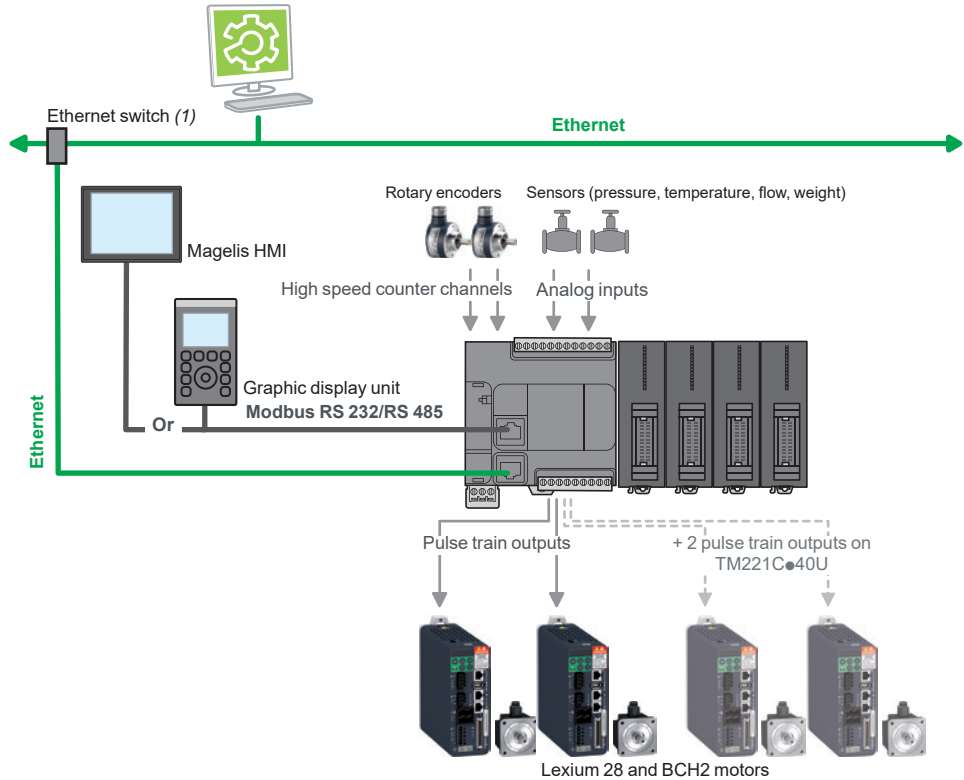

■ M221 Book (TM221M●●●●) controllers

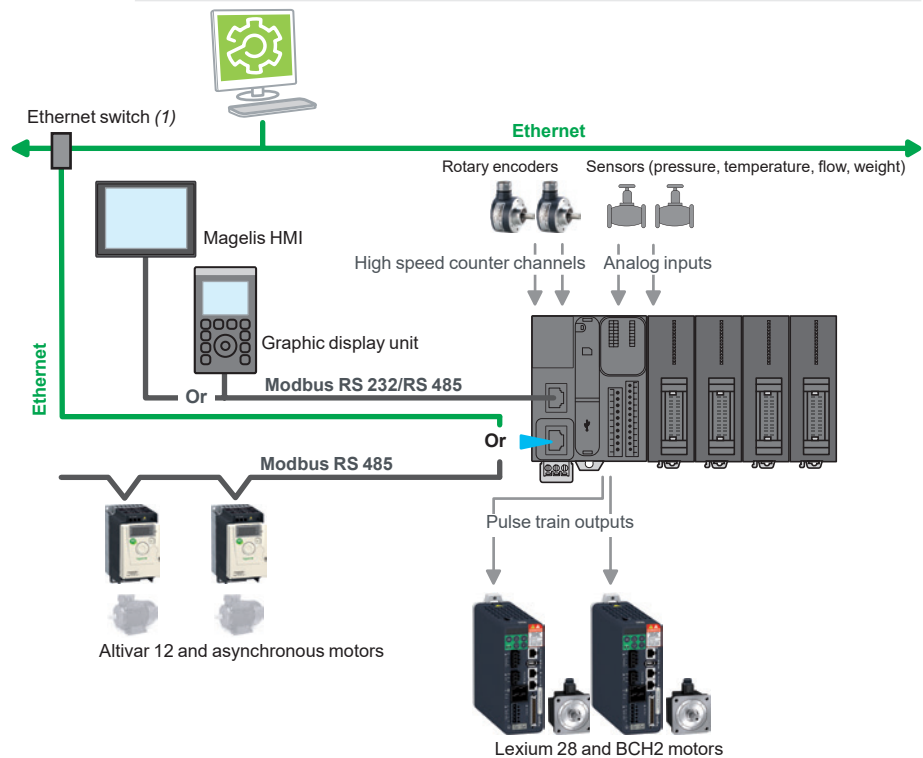

(1) Only use one switch, as Hubs are not compatible.

Modicon M221 and M221 Book logic controllers

Embedded communication Characteristics

Embedded communication

Communication on Ethernet network

TM221CE●●● and TM221ME●●● controllers have an embedded RJ 45 Ethernet port (10/100 Mbps, MDI/MDIX) with Modbus TCP (Client/Server and IOScanner), and Ethernet IP (adapter) protocols.

- As well as the default address based on the MAC address, it is possible to assign the controller IP address via a DHCP server or via a BOOTP server.
- The Ethernet port also offers the same application upload/download, update, and debug functions when the controller is supplied with power.
- A firewall can be used to lock each communication protocol.

For connection cables and accessories for Industrial Ethernet network, see page 24.

Serial links

- Each TM221C●●● controller has an embedded serial link that can be configured as RS 232 or RS 485. A 5 V/200 mA power supply is available on the RJ 45 connector, which then supplies the **TMH2GDB** display unit or Magelis **XBTN** or **XBTRT** HMI.
- Each TM221M●●● controller has one or two embedded serial links.
 - The SL1 serial link, found on each M221 Book controller, can be configured as RS 232 or RS 485. A 5 V/200 mA power supply is available on the RJ 45 connector, which then supplies the **TMH2GDB** display unit, Magelis **XBTN** or **XBTRT** HMI, or other device.
 - The SL2 serial link, found on TM221M16●●●, TM221M24●●● and TM221M40●●● controllers only, is configured as RS 485.

Serial links also offer application upload/download, update, and debug functions when the controller is supplied with power. Embedded in both links are the three main commercially-available protocols:

- Modbus ASCII/RTU Master or Slave
- ASCII character string
- Modbus Serial IOScanner

For connection cables and accessories for serial link, see page 22.

Software programming with power off charging function

The programming port, equipped with a USB mini-B connector, is embedded in each M221 and M221 Book controller; it is dedicated to communication with a PC equipped with SoMachine Basic for programming, debugging, and maintenance. In addition, it offers the ability to load an application program or update the firmware without the controller being powered by another source.

Characteristics of M221 and M221 Book logic controllers

- Certifications: CE, UL Listing Mark, CSA, RCM, EAC, LR, ABS, DNV - GL
- Standards: IEC/EN 61131-2 (Edition 2 2007), UL 508 (UL 61010-2-201), ANSI/ISA 12.12.01-2007, CSA C22.2 No. 213, No. 142, E61131-2, and IACS E10

Environment

- Ambient operating temperature: - 10...+ 55 °C (14...+ 131 °F)
- Storage temperature: - 25...+ 70 °C (- 13...+ 158 °F)
- Relative humidity: 10...95% (non-condensing)
- Operating altitude:
 - 0...2,000 m (0...6,562 ft): complete specification for temperature and insulation
 - 2,000...4,000 m (6,562...13,123 ft):
 - temperature derating: + 1 °C/400 m (+ 1.8 °F/1,312 ft)
 - insulation losses: 150 V ÷/1,000 m (3,280 ft)
 - Storage altitude: 0...3,000 m (0...9,842 ft)
- Immunity to mechanical stress (vibrations):
 - For 1131: 5...8.4 Hz (amplitude 3.5 mm/0.138 in.); 8.4...150 Hz (acceleration 1 g)
 - For merchant navy: 5...13.2 Hz (amplitude 1.0 mm/0.039 in.); 13.2...100 Hz (acceleration 0.7g)


Power supply

Two power supply types are available depending on the M221 controller model: 24 V ÷ or 100-240 V ~ 50/60 Hz


- Voltage limit (including ripple): 19.2...28.8 V ÷/85...264 V ~
- Immunity to micro-cuts (class PS-2): 10 ms
- Max. consumption:
 - TM221 powered with AC, depending on model: 31...41 VA without expansion modules, 46...70 VA with maximum expansion module configuration
 - TM221 powered with DC, depending on model: 3.2...4.9 W without expansion modules, 10...23 W with maximum expansion module configuration

Modicon M221 and M221 Book logic controllers


Modicon M221 logic controllers

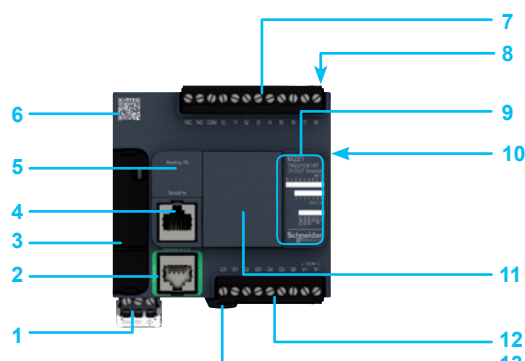

M221: 16 I/O

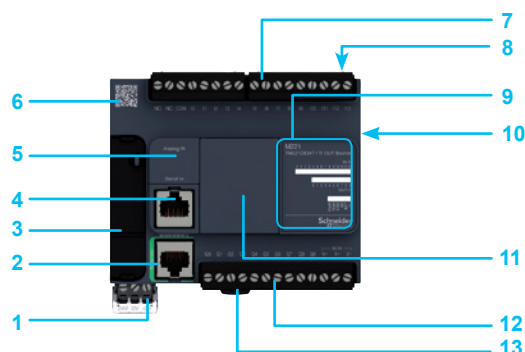

M221: 24 I/O

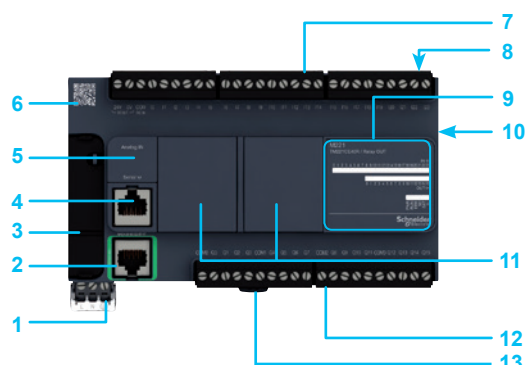

M221: 40 I/O



TMH2GDB

Description

M221 logic controllers (TM221C●●●)

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V $\overline{\text{DC}}$ or 100-240 V \sim power supply (depending on the model)
- 2 On TM221CE●●● controllers: RJ 45 connector for Ethernet network, with activity and exchange speed LED indicator
- 3 Behind the removable cover:
 - Mini-B USB connector for connecting a PC equipped with SoMachine Basic software
 - Slot for the industrial SD memory card
 - Run/Stop switch
- 4 Serial link port (RS 232 or RS 485): RJ 45 connector
- 5 Behind a flap: dedicated removable connector for two analog inputs
- 6 QR code for access to the controller technical documentation
- 7 Connection of 24 V $\overline{\text{DC}}$ logic inputs on removable screw terminal blocks (1)
- 8 On top of the controller: slot for backup battery
- 9 LED display block showing:
 - the status of the controller and its components (battery, industrial SD memory card)
 - the status of the serial link
 - the status of the embedded I/O
- 10 On the side of the controller: TM3 bus connector for the link with a Modicon TM3 expansion module
- 11 Slot(s) for I/O cartridge(s), communication cartridge, or application cartridge(s): one on M221 controllers with 16 and 24 I/O, two on M221 controllers with 40 I/O
- 12 Connection of relay/transistor logic outputs: on removable screw terminal blocks (1)
- 13 Clip for locking on U symmetrical rail

(1) Removable screw terminal blocks equipped with screw terminals, supplied with M221 controller.

Graphic display unit TMH2GDB


- 1 Control screen: backlit STN graphic screen, two-tone (white/red)
- 2 Ten command buttons, two of which can be customized with the option of identifying associated functions
- 3 Rotary navigation and control wheel

On the back of the display unit:


- 4 Mounting system consisting of locking nut, seal, and anti-rotation tee
- 5 RJ 45 connector for the cable connecting the graphic display unit to the Modicon M221/M221 Book logic controller

Modicon M221 and M221 Book logic controllers


Modicon M221 Book logic controllers

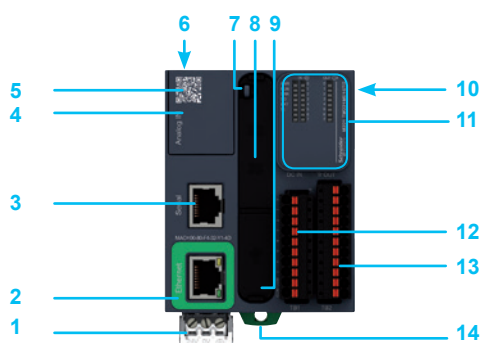

TM221ME16TG

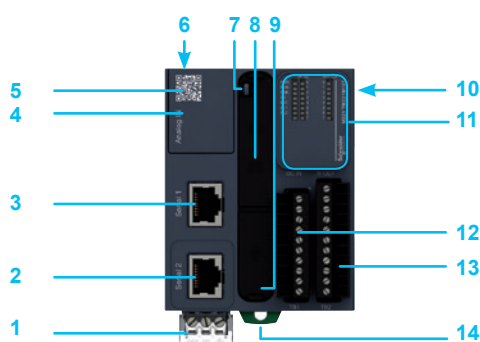

TM221M16T

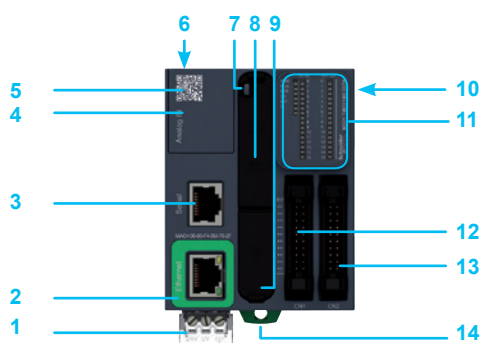

TM221ME32TK



TMH2GDB

Description

M221 Book logic controllers (TM221M●●)

- 1 Removable screw terminal block, 3 terminals for connecting the 24 V $\overline{\text{---}}$ supply
 - 2 On TM221ME16●● and TM221ME32●● controllers: RJ 45 connector for Ethernet network, with activity and exchange speed LED indicator
On TM221M16●● and TM221M32●● controllers: RJ 45 connector for SL2 serial link
 - 3 SL1 serial link port (RJ 45 connector)
 - 4 Behind the removable cover: removable connector for two analog inputs
 - 5 QR identification code for the controller technical documentation
 - 6 Backup battery slot
- Behind the removable cover: 7, 8, and 9
- 7 Slot for the industrial SD memory card
 - 8 Run/Stop switch
 - 9 Mini-B USB connector for connecting a PC equipped with SoMachine Basic software
 - 10 TM3 bus connector for linking to a Modicon TM3 expansion module
 - 11 LED display block showing:
 - the status of the controller and its components (battery, industrial SD memory card)
 - the status of the serial links
 - the status of the I/O
 - 12 Connection of 24 V $\overline{\text{---}}$ logic inputs:
 - on 16-channel controllers: removable screw or spring terminal blocks (1)
 - on 32-channel controllers: HE10 connector
 - 13 Connection of relay/transistor logic outputs:
 - on 16-channel controllers: removable screw or spring terminal blocks (1)
 - on 32-channel controllers: HE10 connector
 - 14 Clip for locking on \perp symmetrical rail

(1) Removable terminal blocks equipped with screw or spring-type terminals depending on controller type. Terminal blocks supplied with M221 Book controller.

Graphic display unit TMH2GDB

Description: see page 16

Modicon M221 and M221 Book logic controllers

Modicon M221 logic controllers



TM221C16R, TM221C16T,
TM221C16U



TM221CE16R, M221CE16T,
TM221CE16U



TM221C24R, M221C24T,
TM221C24U



TM221CE24R, TM221CE24T,
TM221CE24U



TM221C40R, TM221C40T,
TM221C40U



TM221CE40R, TM221CE40T,
TM221CE40U



TMC2AI2



TMC2AQ2V



TMC2AQ2C



TMC2TI2



TMC2SL1



TMC2PACK01



TMC2HOIS01



TMC2CONV01

References

Modicon M221 logic controllers (1)

Number of logic I/O	Logic inputs	Logic outputs	Analog inputs	Integrated communication ports (2)		Reference	Weight kg/lb
				Ethernet (RJ 45)	Serial link (RJ 45)		
■ 100-240 V ~ power supply							
16 inputs/outputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	7 relay outputs	2 x 0...10 V inputs	—	1	TM221C16R	0.346 0.763
				1	1	TM221CE16R	0.346 0.763
24 inputs/outputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	10 relay outputs	2 x 0...10 V inputs	—	1	TM221C24R	0.395 0.871
				1	1	TM221CE24R	0.395 0.871
40 inputs/outputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	16 relay outputs	2 x 0...10 V inputs	—	1	TM221C40R	0.456 1.005
				1	1	TM221CE40R	0.456 1.005
■ 24 V ~ power supply							
16 inputs/outputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	7 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C16T	0.346 0.763
				1	1	TM221CE16T	0.346 0.763
24 inputs/outputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	10 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C24T	0.395 0.871
				1	1	TM221CE24T	0.395 0.871
40 inputs/outputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	16 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C40T	0.456 1.005
				1	1	TM221CE40T	0.456 1.005
16 inputs/outputs	9 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	7 sink transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C16U	0.558 1.230
				1	1	TM221CE16U	0.626 1.380
24 inputs/outputs	14 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	10 sink transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C24U	0.770 1.698
				1	1	TM221CE24U	0.570 1.257
40 inputs/outputs	24 sink/source 24 V ~ inputs, inc. 4 high-speed inputs	16 sink transistor outputs, inc. 4 high-speed outputs	2 x 0...10 V inputs	—	1	TM221C40U	0.630 1.389
				1	1	TM221CE40U	0.780 1.720

Options for Modicon TM221C logic controllers (3)

Description	Function	Reference	Weight kg/lb
I/O cartridges	2 analog inputs (12-bit resolution) configurable as:	TMC2AI2	0.025
	- 0...10 V voltage		0.055
	- 0...20 mA/4...20 mA current		
	Screw terminal version		
	2 analog outputs (12-bit resolution) 0...10 V voltage	TMC2AQ2V	0.025
Screw terminal version	2 analog outputs (12-bit resolution) 4...20 mA current	TMC2AQ2C	0.025
	Screw terminal version		0.055
	2 temperature inputs (12-bit resolution) type K, J, R, S, B, E, T, N, C, PT100, PT1000, NI100, NI1000	TMC2TI2	0.025
	Screw terminal version		0.055
Communication cartridge	1 additional serial link on screw terminal block	TMC2SL1 (4)	0.025 0.055
Cartridges for specific application	Hoisting application	TMC2HOIS01	0.025 0.055
	Packaging application	TMC2PACK01	0.025 0.055
	Conveyor system application	TMC2CONV01 (4)	0.025 0.055

(1) M221 controllers are supplied with:

- removable screw terminal blocks for connecting the I/O
- a removable screw terminal block for connecting the power supply
- a button cell backup battery (BR2032)
- a cable for connecting the analog inputs

(2) Each M221 logic controller has an embedded USB mini-B programming port.

(3) One cartridge for controllers with 16 and 24 I/O. Two cartridges maximum for controllers with 40 I/O, only one of which can be a communication cartridge.

(4) Just one cartridge per controller.

Modicon M221 and M221 Book logic controllers

Modicon M221 Book logic controllers



TM221M16RG



TM221M16T



TM221ME16RG



TM221ME16T



TM221M16TG



TM221M32TK



TM221ME32TK

References								
Modicon M221 Book logic controllers ⁽¹⁾								
24 V \square power supply								
No. of logic I/O	Logic inputs	Logic outputs	Analog inputs	Embedded communication ports ⁽²⁾	Terminal block for I/O conn. Interval (mm/in.)		Reference	Weight kg/lb
					Ethernet (RJ 45)	Serial link SL1 (RJ 45) SL2 (RJ 45)		
16 inputs/ outputs	8 sink/source 24 V \square inputs, inc. 4 high-speed inputs	8 relay outputs	2 x 0...10 V inputs	–	1	1	Screw (3.81/0.15)	TM221M16R 0.264 0.582
				–	1	1	Spring (3.81/0.15)	TM221M16RG 0.264 0.582
				1	1	–	Screw (3.81/0.15)	TM221ME16R 0.264 0.582
				1	1	–	Spring (3.81/0.15)	TM221ME16RG 0.264 0.582
		8 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	–	1	1	Screw (3.81/0.15)	TM221M16T 0.264 0.582
				–	1	1	Spring (3.81/0.15)	TM221M16TG 0.264 0.582
32 inputs/ outputs	16 sink/source 24 V \square inputs, inc. 4 high-speed inputs	16 source transistor outputs, inc. 2 high-speed outputs	2 x 0...10 V inputs	–	1	1	HE 10 connector	TM221M32TK 0.270 0.595
				1	1	–	HE 10 connector	TM221ME32TK 0.270 0.595

(1) M221 Book controllers are supplied with:

- removable terminal blocks (screw or spring-type depending on controller model) for connecting the I/O
- a removable screw terminal block for connecting the power supply
- a button cell backup battery (BR2032)
- a cable for connecting the analog inputs

(2) Each M221 Book logic controller has an embedded USB mini-B programming port.

Modicon M221 and M221 Book logic controllers

Options, separate parts



TMH2GDB



ZB5AZ905



A9A15151



DX1AP52



XBTZ9980



TMSD1



TMAHOL02

References

Remote graphic display unit, mounting accessories, cable

Designation	Description	Unit reference	Weight kg/lb
Remote graphic display unit	<input type="checkbox"/> For data display and modification (1) <input type="checkbox"/> Contains 1 bezel key ZB5AZ905	TMH2GDB	0.170 0.37
Tightening tool	For tightening the cover on Ø 22 mm unit	ZB5AZ905	0.016 0.04
Mounting plate for symmetrical rail (Sold in lots of 4)	For clipping onto 35 mm (1.378 in.) symmetrical rail (1 hole Ø 22 mm (0.87 in.))	A9A15151	0.040 0.09
Metal bracket for panel mounting, threaded (Sold in lots of 10)	1 hole Ø 22 mm (0.87 in.) Mounted using 2 screws, 7 mm (0.28 in.) diameter	DX1AP52	0.065 0.014
Connecting cables Used between TMH2GDB remote display unit and M221/M221 Book logic controller	Equipped with an RJ 45 connector at each end Length: 2.5 m (8.2 ft)	XBTZ9980	0.230 0.51
	Equipped with an RJ 45 connector at each end Length: 1 m (3.28 ft)	VW3A1104R10	0.050 0.110

Option

Industrial SD memory card	Application backup and program transfer Capacity: 256 MB	TMSD1	0.004 0.009
---------------------------	---	-------	----------------

Separate parts

Designation	Description	Unit reference	Weight kg/lb
Mounting kit (Sold in lots of 10)	For plate or panel mounting of M221 and M221 Book controllers	TMAM2	0.065 0.143

Replacement parts

Designation	Description	Reference	Weight kg/lb
Set of terminal blocks for connecting the power supply on M221 and M221 Book logic controllers	8 removable screw terminal blocks	TMAT2PSET	0.127 0.280
Set of terminal blocks for connecting the I/O on M221 controllers	Removable screw terminal connectors: 8 different connectors for equipping a TM221C logic controller (8 x I/O)	TMAT2CSET	0.127 0.280
Set of terminal blocks for connecting the I/O on M221 Book controllers	4 x 10-way and 4 x 11-way removable terminal blocks with screw terminals	TMAT2MSET	0.127 0.280
	4 x 10-way and 4 x 11-way removable terminal blocks with spring terminals	TMAT2MSETG	0.127 0.280
Set of battery holders	2 spare battery holders for M221 and M221 Book controllers	TMAHOL02	0.130 0.286
Backup battery	The battery supplied with each controller is not available as a spare part in the Schneider catalog. If a replacement part is needed, use a Panasonic battery type BR2032 only.		


(1) Compatible only with M221 and M221 Book logic controllers whose firmware is version V1.3 or later. HMI pages can be configured with SoMachine Basic from version V1.3.

Modicon M221 and M221 Book logic controllers

Programming software, expansion modules, connection cables



SoMachine Basic software



TCSXCNAMUM3P

References

Programming software

Description	For use with	Reference
SoMachine Basic	For Modicon M221 and M221 Book logic controllers	Please consult our website: www.schneider-electric.com

Expansion modules

Description	For use with	Reference
Modicon TM3 expansion modules	For Modicon M221 and M221 Book logic controllers	Please consult our website: www.schneider-electric.com

Connection cables

Description	Use	Length	Reference	Weight kg/lb
Programming cordsets	From the PC USB port to the USB mini-B port on M221 and M221 Book controllers	3 m (0.98 ft)	TCSXCNAMUM3P (1)	0.065 0.143
		1.8 m (5.90 ft)	BMXXCAUSBH018	0.065 0.143
Cable for connecting the analog inputs embedded in M221 and M221 Book controllers	Equipped with 1 dedicated removable connector at one end and bare wires at the other end	1 m (3.28 ft)	TMACBL1	0.024 0.053

(1) Unshielded, non-grounded cable. Only for use on temporary connections. For permanent connections, use cable reference BMXXCAUSBH018.


Presentation

RS 232/RS 485 serial links offer a simple solution to the communication needs of compact machines.

Modbus and ASCII standard communication protocols are used to connect numerous equipment items such as: HMIs, printers, energy meters, variable speed drives, motor starters, remote I/O (RIO), etc. Thanks to the I/O Scanner function, this equipment is just as easy to integrate into the application as the local I/O.

Description

- Modicon M221 Book logic controllers with 16, 24 or 40 I/O have the following on the front panel:
 - 1 A serial link port with an RJ 45 connector delivering a voltage of 5 V (200 mA) to supply an HMI or Bluetooth® adapter with power.
 - 2 A slot for a 2nd serial link port (with connection on screw terminals) by inserting the **TMC2SL1** communication cartridge or the **TMC2CONV01** application cartridge (1).
- Modicon M221 Book logic controllers with 16 or 32 I/O have the following on the front panel:
 - 3 A serial link port with an RJ 45 connector delivering a voltage of 5 V (200 mA) to supply an HMI or Bluetooth® adapter with power
 - 4 A 2nd serial port also equipped with an RJ 45 connector for **TM221M16●●** and **TM221M32●●** controllers (controllers without embedded Ethernet).




Controller Type	Embedded Ports		Optional Port (1 max. per controller)
	"Serial" or Serial 1" port, RJ 45 connector	"Serial 2" port, RJ 45 connector	
TM221C●●●●	RS 232/RS 485 with 5 V (200 mA) power supply for HMI or Bluetooth communication adapter (items 1/3)	—	On TMC2SL1 or TMC2CONV01 option cartridges, connection on screw terminals
TM221M●●●●	—	RS 485 (item 4)	—
TM221ME●●●●	—	—	—

(1) TM221C40●●●● controllers have 2 slots for a cartridge; only one cartridge, TMC2SL1 or TMC2CONV01, can be used per controller. The other slot remains available for an analog I/O cartridge or an application cartridge.


Modbus serial link wiring system

Non-isolated bus

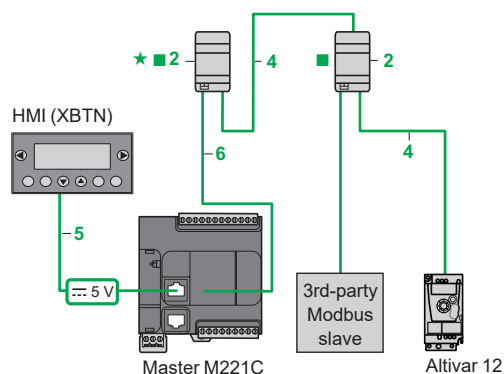

- Total length of cables between M221 and ATV 12: ≤ 30 m (98.425 ft)
- Length of cable 4: ≤ 10 m (32.808 ft)
- ★ Line polarization active. ■ Line termination

Isolated bus (recommended for bus > 10 m/32.808 ft)

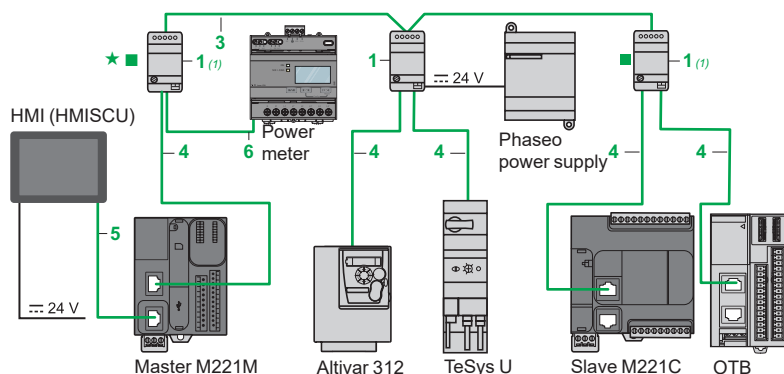

- Total length of cables between isolation boxes 1: ≤ 1,000 m (3,280.840 ft)
- Length of drop cables 4 or 5: ≤ 10 m (32.808 ft)
- ★ Line polarization active. ■ Line termination
- (1) Box powered by the logic controller.

References



TWDXCAISO



TWDXCAT3RJ



LU9GC3



TSXSCA50



XGSZ24

Tap-off and adapter components for RS 485 serial link						
Designation	Description	Item	Length	Unit reference	Weight	
					kg	lb
T-junction box with line isolation Screw terminal block for trunk cable 2 x RJ 45 for tap-off	<input type="checkbox"/> Isolation of the RS 485 link (1) <input type="checkbox"/> Line termination (RC 120 Ω, 1 nF) <input type="checkbox"/> Line pre-polarization (2 R 620 Ω) <input type="checkbox"/> Power supply: 24 V \pm (screw terminals) or 5 V \pm (via RJ 45) <input type="checkbox"/> Mounting on 35 mm (1.378 in.) \perp	1	—	TWDXCAISO	0.100 0.220	
T-junction box 1 RJ 45 for trunk cable 2 x RJ 45 for tap-off	<input type="checkbox"/> Line termination (RC 120 Ω, 1 nF) <input type="checkbox"/> Line pre-polarization (2 R 620 Ω) <input type="checkbox"/> Mounting on 35 mm (1.378 in.) \perp	2	—	TWDXCAT3RJ	0.080 0.176	
Modbus splitter box Screw terminal block for trunk cable 10 x RJ 45 for tap-off	<input type="checkbox"/> Mounting on 35 mm \perp , on plate or panel	—	—	LU9GC3	0.500 1.102	
T-junctions 2 x RJ 45 for trunk cable	1 integrated cable with RJ 45 connector for tap-off dedicated to Altivar variable speed drive	—	0.3 m 0.984 ft 1 m 3.281 ft	VW3A8306TF03 VW3A8306TF10	— —	
Passive T-junction box	<input type="checkbox"/> 1-channel line extension and tap-off on screw terminals <input type="checkbox"/> Line termination	—	—	TSXSCA50	0.520 1.146	
RS 232C/RS 485 line converter	<input type="checkbox"/> Max. data rate 19.2 Kbps. No modem signals <input type="checkbox"/> 24 V \pm /20 mA power supply <input type="checkbox"/> Mounting on 35 mm (1.378 in.) \perp	—	—	XGSZ24	0.100 0.220	
Cables and cordsets for RS 485 serial link						
RS 485 double shielded twisted pair trunk cables	Modbus serial link, supplied without connector	3	100 m 328.064 ft 200 m 656.168 ft 500 m 1,640.420 ft	TSXCSA100 TSXCSA200 TSXCSA500	5.680 12.522 10.920 24.074 30.000 66.139	
Modbus RS 485 cordsets	2 x RJ 45 connectors	4	0.3 m 0.984 ft 1 m 3.281 ft 3 m 9.840 ft	VW3A8306R03 VW3A8306R10 VW3A8306R30	0.030 0.066 0.050 0.110 0.150 0.331	
	1 x RJ 45 connector and 1 end with flying leads	6	1 m 3.281 ft 3 m 9.843 ft	TWDXCAFJ010 VW3A8306D30	0.060 0.132 0.150 0.331	
Controller to Magelis HMI cordsets	2 x RJ 45 connectors Compatible with: <input type="checkbox"/> Com Port 1 on XBTN200/N400/R400/RT500 (2) <input type="checkbox"/> Com Port 1 on XBTRT511/HMISTO/STU/SCU <input type="checkbox"/> Com Port 2 on XBTGT2●●0...7●●0 and HMIGTO	5	2.5 m 8.202 ft	XBTZ9980	0.230 0.507	
	1 x RJ 45 connector and 1 x 25-way SUB-D connector Compatible with: <input type="checkbox"/> Com Port 1 on XBTN410/N410 and XBTR410/R411	—	2.5 m 8.202 ft	XBTZ938	0.210 0.463	
	1 x RJ 45 connector and 1 x 9-way SUB-D connector Compatible with: <input type="checkbox"/> Com Port 1 on XBTGT2●●0...7●●0	—	2.5 m 8.202 ft	XBTZ9008	—	
TMC2SL1 cartridge to Magelis HMI cordsets	1 x RJ 45 connector and stripped wires Compatible with: <input type="checkbox"/> Com Port 1 on XBTRT511/HMISTO/STU/SCU <input type="checkbox"/> Com Port 2 on XBTGT2●●0...7●●0 and HMIGTO	—	3 m 9.843 ft	VW3A8306D30	0.150 0.331	
Line end adapter Sold in packs of 2	For RJ 45 connector R = 120 Ω, C = 1 nF	—	—	VW3A8306RC	0.200 0.441	
Cordsets for RS 232 serial link						
Cordset for DTE terminal (printer) (3)	Serial link for DTE (2) 1 x RJ 45 connector and 1 x 9-way female SUB-D connector		3 m 9.843 ft	TCSMCN3M4F3C2	0.150 0.331	
Cordset for DCE terminal (modem, converter)	Serial link for point to point device (DCE) 1 x RJ 45 connector and 1 x 9-way male SUB-D connector		3 m 9.843 ft	TCSMCN3M4M3S2	0.150 0.331	

(1) Line isolation recommended for line distances > 10 m (32.808 ft).

(2) Can only be connected to the controller SL or SL1 ports in order to supply the Magelis terminal with power.

(3) If the terminal is equipped with a 25-way SUB-D connector, you will also need to order the 25-way female/9-way male SUB-D adapter TSXCTC07.

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module

General

Industrial Ethernet is the term used to refer to industrial communication protocols which use standard Ethernet physical layers such as:

- ☐ EtherNet/IP
- ☐ Modbus TCP
- ☐ TCP and UDP

On an Industrial Ethernet network, it is possible to connect:

- ☐ industrial products (industrial communication protocols) such as controllers, variable speed drives, robots, etc.
- ☐ products using TCP/UDP-based proprietary protocols

In addition, it is possible to use different Industrial Ethernet protocols on the same network simultaneously.

EtherNet/IP protocol

EtherNet/IP is an industrial communication protocol based on CIP (Common Industrial Protocol), owned and managed by the ODVA, an international independent standards organization (www.odva.org).

EtherNet/IP results from implementation of the CIP protocol on standard Ethernet. EtherNet/IP operates on the same equipment and the same infrastructure as Modbus TCP, and both protocols can be activated simultaneously and at any time on the network.

EtherNet/IP is a robust protocol which allows the use of sophisticated equipment such as cameras, robots, etc.

Advanced services and outstanding performance

EtherNet/IP is object-oriented. In each EtherNet/IP device, the data are categorized as objects and each device can be associated with several types of object depending on its intended purpose. Equipment is integrated more easily thanks to predefined objects and standards.

The EtherNet/IP protocol uses an Originator/Adapter architecture for data exchange.

Modbus TCP protocol

Modbus has been the industry communication standard since 1979. During the internet revolution, Modbus was combined with Ethernet to form Modbus TCP, a completely open Ethernet protocol.

Modbus TCP, simple and open

The Modbus application layer is simple and universally familiar with its 9 million installed connections.

- ☐ Thousands of manufacturers have already implemented this protocol. Many have already developed a Modbus TCP connection and numerous products are presently available.
- ☐ The simplicity of Modbus TCP enables any fieldbus device, such as an I/O module, to communicate over Ethernet without the need for a powerful microprocessor or a lot of internal memory.

Modbus TCP, a standard

- ☐ The application protocol is identical on Modbus serial link and Modbus TCP: messages can be routed from one network to the other without converting the protocol.
- ☐ Since Modbus operates on the TCP/IP higher layer, users benefit from IP routing, thus enabling devices located anywhere in the world to communicate without worrying about the distance between them. Modbus and Modbus TCP are recognized as a fieldbus by the international standard IEC/EN 61158. They also comply with the "national Chinese standard" managed by ITEI.

The Modbus TCP protocol uses a client/server architecture for data exchange.

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module

Modicon M221, M241 and M251 logic controllers

The embedded Ethernet communication ports in the Modicon M221, M241 or M251 logic controllers and in the Modicon TM4ES4 communication module optimize machine integration in factory network architectures.

Modicon M221, M241 and M251 logic controllers can easily be integrated in architectures such as:

- machine to devices (variable speed drives, remote I/O modules, HMI terminals) with the I/O Scanner function
- machine to machine with the NGVL function
- machine to supervision with the Modbus Client/Server, EtherNet/IP Adapter and OPC UA Server function

Ethernet also brings transparency to the factory, in particular - thanks to the firewall functions - making it possible from any point on the network to safely:

- program, monitor a controller or download an application
- access device parameters, variable speed drives for example

A simple web browser can be used to access machines anytime anywhere, using a tablet or smartphone, for example, using the web servers embedded in Modicon M241 and M251 controllers.

Safety can be enhanced by the use of VPN modems (see our Partner program on our website www.schneider-electric.com > Products and Services > Automation and Control > Collaborative Automation Partner Program).

Main devices supported

	Equipment	Protocols supported			SoMachine software integration tools (1)
		TCP/UDP	Modbus TCP	EtherNet/IP	
Variable speed drives	Altivar 32	–	✓	✓	FDR, DTM, TVDA
	Altivar 320	–	✓	✓	FDR, DTM, TVDA
	Altivar 340	–	✓	✓	FDR, DTM, TVDA
	Altivar Process ATV600	–	✓	✓	FDR, DTM, TVDA
	Altivar 71	–	✓	✓	FDR, DTM, TVDA
	Altivar Process ATV900	–	✓	✓	FDR, DTM, TVDA
Servo drive	Lexium 32 M	–	✓	✓	FDR, DTM, TVDA
Integrated servo drives	Lexium ILA	–	✓	✓	FDR, libraries, TVDA
	Lexium ILE	–	✓	✓	FDR, libraries, TVDA
	Lexium ILS	–	✓	✓	FDR, libraries, TVDA
Radio frequency identification	OsiSense XG	–	✓	✓	TVDA
Vision sensors	OsiSense OsiSense XUW	–	–	✓	TVDA
Distributed I/O modules	Modicon OTB1EODM9LP	–	✓	–	Libraries
Modular safety controllers	Preventa XPSMCM	–	(2)	✓	TVDA for EtherNet/IP
Wireless pushbuttons (metal/plastic) without batteries	Harmony XB4R/XB5R	–	✓	–	DTM, libraries
Logic controllers	Modicon M221/M241/M251	✓	✓	✓	User parameters (only for EtherNet/IP), libraries
Equipment supplied with EDS file (1)		–	–	✓	User parameters
Generic equipment		✓	✓	✓	User parameters (only for EtherNet/IP), libraries


(1) SoMachine configuration software: please consult our catalog DIA3ED2140110FR/EN.pdf or our website www.schneider-electric.com

- FDR: "Fast Device Replacement"
- DTM: "Device Type Manager"
- TVDA: Tested Validated Documented Architectures


(2) Integration as a generic device.

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module

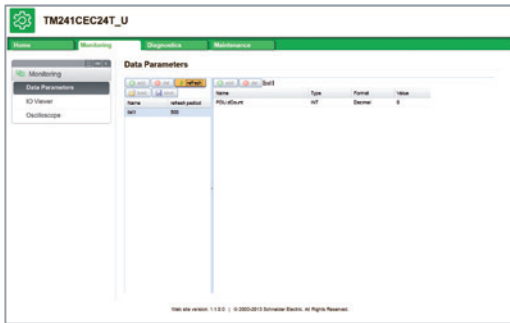

Preconfigured Web server

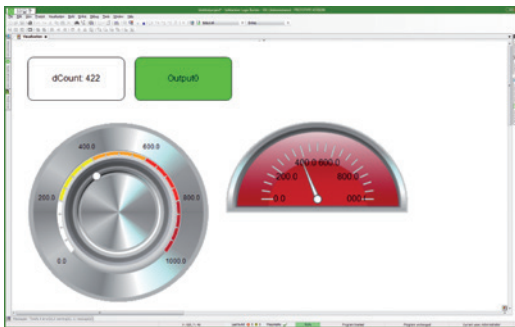

Viewer Web server

Web servers

Preconfigured Web server

Using a simple web browser available on PC, smartphone or tablet, this server authorizes the following "ready-to-use" functions:

- With no prior programming
 - Display of the I/O states
 - Controller diagnostics, and of its expansion and communication modules
 - Communication port diagnostics
 - I/O Scanner function diagnostics
 - Maintenance and configuration functions (Ethernet/IP, firewall, etc.)
- After configuration
 - Viewing data values
 - Viewing their evolution over time (oscilloscope function)

Viewer Web server

The SoMachine programming software is used to create customized pages for viewing and monitoring devices. These pages can also be accessed on any mobile device such as a tablet or smartphone with any operating system (iOS, Android, Windows).

Description of Ethernet services

Network Global Variable List (NGVL)

The NGVL protocol allows a controller to share data with other controllers on a local Ethernet network (LAN) or subscribe to data published by other controllers which support the NGVL protocol and thus allowing, for example, synchronization between control platforms.

I/O Scanner (Industrial Ethernet Manager)

The Industrial Ethernet Manager service is used to manage the exchange of remote I/O states over the Ethernet network after a simple configuration operation, with no need for special programming.

I/O Scanning is performed transparently by means of read/write requests in accordance with the Modbus TCP or EtherNet/IP protocol, so we talk about Scanner Manager on Modbus TCP or Scanner Manager on EtherNet/IP.

Slave Modbus TCP

This function can be used to create a dedicated I/O table in the controller, which can be accessed via the Modbus TCP protocol and by a controller with the Modbus TCP I/O Scanner function.

Fast Device Replacement (FDR)


This service uses standard address management technologies (BOOTP, DHCP) and the TFTP (Trivial File Transfer Protocol) file management service, in order to simplify maintenance of Ethernet products.

The FDR service is used to replace a device with a new device; the device is detected, reconfigured and automatically rebooted by the system.

Access to files via FTP (File Transfer Protocol)

This service provides access to the controller files from, for example, a PC (FTP client) and is used to exchange files such as application programs, data, etc.

This service can be accessed even if the controller has no application program in its memory.

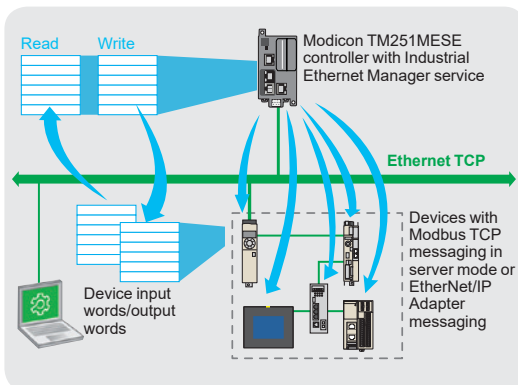

I/O Scanner (Industrial Ethernet Manager)

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module

Description of Ethernet services

Dynamic Host Configuration Protocol (DHCP)

This protocol can be used to assign an address to a controller (DHCP/BOOTP client) automatically. This address can be:

- fixed and determined either in the SoMachine software or included in a post-configuration file
- assigned by a controller with the DHCP server or BOOTP server function (such as the **TM251MESE** logic controller)

SNMP (Simple Network Management Protocol)

From a network management station, the SNMP protocol is used to monitor and control the Ethernet architecture components, meaning problems are diagnosed quickly.

The SNMP protocol is used to access configuration and management objects that are contained in the device MIBs (Management Information Bases).

Modicon M241 and M251 controllers support the "MIB 2 Standard" SNMP network management interface. This interface accesses a first level of network management; it enables the manager to identify the devices making up the architecture and retrieve general information about configuration and operation of the Ethernet Modbus TCP interfaces.

IP address filter (Whitelisting)

IP addresses that are authorized to access the controller can be loaded in the controller from either an SD card or an FTP client.

Locking communication protocols

Not only SoMachine, NetManage (1), SNMP communication protocols but also Modbus, Web and FTP servers can be locked individually in the SoMachine software.

EtherNet/IP Adapter

This function can be used to create a dedicated I/O table in the controller, which can be accessed via the EtherNet/IP protocol and by a controller with the EtherNet/IP Originator function. EtherNet/IP Adapter has the same role for EtherNet/IP as a slave Modbus TCP.

EtherNet/IP Originator

Controllers with this function are responsible for exchanges with devices with the EtherNet/IP Adapter function. EtherNet/IP Originator has the same role for EtherNet/IP as a master Modbus TCP.

SNTP Client

For synchronizing controller clocks in the same network. The PLC can synchronize its time with an NTP/SNTP Server.

DNS Client

This service is used to convert a domain name to the IP address of the machine with this name.

OPC UA Server

OPC Unified Architecture (OPC UA) is an independent communication protocol for industrial automation applications. It is based on the client-server principle and allows sensors and actuators to communicate transparently with the ERP system or the cloud. The OPC UA Server is directly integrated in Modicon M241 and M251 controllers, allowing direct communication without passing via gateways and additional PCs with supervision systems.

(1) The NetManage function can automatically detect which controllers are present on the network. It also offers the option of straightforward connection to any controller present on the network in order to identify it physically by means of a visual or audible message and modify its parameters or manage the resident application.

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module

Transparent Ready class and Functions						
	Logic controllers					Ethernet switch module
	TM221ME●●●, TM221CE●●●	TM241C●●●	TM241CE●●●	TM251MES4	TM251MESE	TM4ES4 (1)
Transparent Ready class	A10	B20				
Internet protocol version	IPv4					
Ethernet services						
Programming, downloading, monitoring		—				
Firmware update	—	—				
Modbus TCP/IP Client/Server		—				
Slave Modbus TCP		—				
EtherNet/IP Adapter		—				—
EtherNet/IP Originator	—	—		—	Ethernet port 2	
Data exchange – NGVL and IEC VAR ACCESS	—	—				
Web server	—	—				
MIB2 Client/Server SNMP network management	—	—				
Scanner Manager on Modbus TCP	—	—		—	Ethernet port 2	—
Scanner Manager on EtherNet/IP	—	—		—	Ethernet port 2	—
FTP Client/Server file transfer	—	—				
DHCP Client dynamic configuration		—			Ethernet port 1	
DHCP Server dynamic configuration	—	—		—	Ethernet port 2	—
FDR fast device replacement	—	—		—		—
SMS	(2)	—				
SQL Client (3)	—	—				—
Email sending and receipt, based on TCP/UDP library	—	—				—
DNS Client	—	—				
SNTP Client	—	—				
OPC UA Server	—	—				
NGVL	—	—				
Viewer Web	—	—				
Web system	—	—				
Safety functions						
IP address filter (Whitelisting)	—	—				
Locking communication protocols		—				
Locking IP address routing	—	—				
Available						

(1) Switch function only: no service for TM251ME and for TM241CE if not configured in SoMachine.

(2) With specific function block in SoMachine Basic software.


(3) For more information, please consult the "SoMachine configuration software" catalog, on our website www.schneider-electric.com.

Network characteristics of Modicon M241 and M251 controllers

Topology	Daisy chain and star with use of switches
Bandwidth	10/100 Mbps
EtherNet/IP Scanner performance	Up to 16 slave devices managed by the controller in 10 ms
Ethernet Modbus TCP Scanner performance	Up to 64 slave devices managed by the controller in 64 ms

Note: When EtherNet/IP and Modbus TCP devices are controlled simultaneously on the same network, 16 devices maximum can be controlled (EtherNet/IP + Modbus TCP).

Ethernet ports on logic controllers and the Ethernet switch module

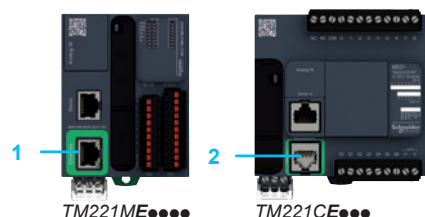


M221 logic controllers

- On **TM221ME** controllers: RJ 45 connector for Ethernet network, with exchange and activity speed LED indicator.
- On **TM221CE** controllers: RJ 45 connector for Ethernet network, with exchange and activity speed LED indicator.




M241 logic controllers

- On **TM241CE** controllers: RJ 45 connector for Ethernet network, with exchange and activity speed LED indicator.

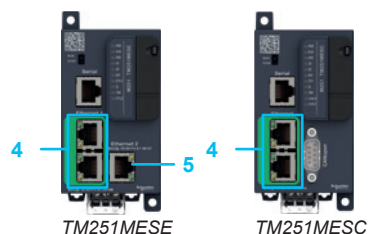

M251 logic controllers


- On **TM251MESE** and **TM251MESD** controllers: 2 connectors connected by an RJ 45 internal switch for "Machine or Factory" Ethernet network, with exchange and activity speed LED indicator.
- On **TM251MESE** controller: RJ 45 connector for "fieldbus" Ethernet network with exchange and activity speed LED indicator. This port can be used with the Industrial Ethernet Manager function.



TM4ES4 Ethernet switch communication module

- 4 RJ 45 connectors for Ethernet network with exchange and activity speed LED indicator.

Industrial Ethernet architecture

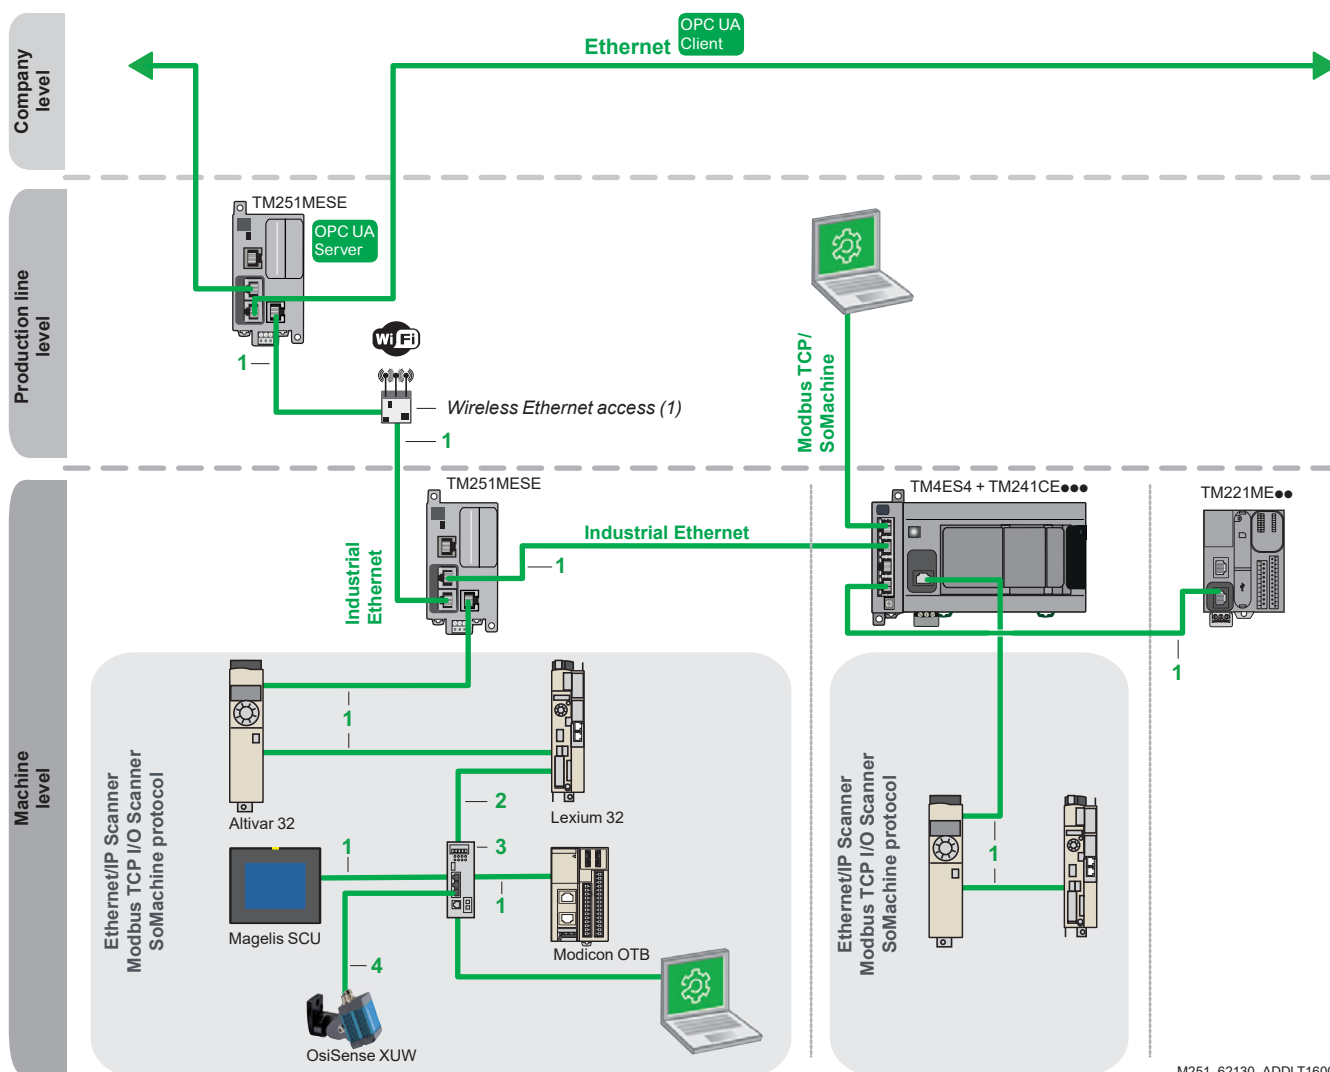

M251_62130_ADDLT16001

Note: The ports on M251 controllers and the TM4ES4 communication module cannot be used to create redundant architectures.

(1) Wireless Ethernet access, see our partner program.

Items 1, 2 and 3: see references on next page.

Item 4: Ethernet XGSZ●2E45●● extension cables (M12 straight/RJ45, shielded cable, straight cabling) for OsiSense XUW vision sensors.

For more information, see our partner website www.tesensors.com.

Shielded copper connection cables

ConneXium shielded connection cables are available in two versions to meet the various current standards and approvals :

■ EIA/TIA 568, shielded twisted pair cables for C€ market

These cables conform to:

- EIA/TIA-568 standard, category CAT 5E
- IEC 11801/EN 50173-1 standard, class D

Their fire resistance conforms to:

- NF C32-070 standard, class C2
- IEC 322/1 standards
- Low Smoke Zero Halogen (LSZH)

■ EIA/TIA 568 shielded twisted pair cables for UL market

These cables are:

- CEC type FT-1
- NEC type CM

A new range of **ConneXium** fully shielded preassembled cables has been specially designed for use in harsh industrial environments.

These cables combine a category 5E shielded cable and RJ 45 connectors reinforced with a metal rail.

Industrial Ethernet network

For Modicon M221, M221 Book, M241 and M251 logic controllers and Modicon TM4ES4 Ethernet switch module



References						
EIA/TIA 568 shielded twisted pair cables for C€ market						
Description	End fittings	Item	Type	Length m (ft)	Reference	Weight kg
Straight-through copper cables compatible C€	2 RJ 45 connectors For connection to terminal devices (DTE)	1	standard	2 (6.56)	490NTW000002	—
				5 (16.41)	490NTW000005	—
				12 (39.37)	490NTW000012	—
				40 (131.23)	490NTW000040	—
				80 (262.467)	490NTW000080	—
		1	ruggedized	1 (3.28)	TCSECE3M3M1S4	—
				2 (6.56)	TCSECE3M3M2S4	—
				3 (9.84)	TCSECE3M3M3S4	—
				5 (16.40)	TCSECE3M3M5S4	—
				10 (32.81)	TCSECE3M3M10S4	—

Shielded twisted pair cables for UL market						
Description	End fittings	Item	Type	Length m (ft)	Reference	Weight kg
Straight-through copper cables UL compatible	2 RJ 45 connectors For connection to terminal devices (DTE)	1	standard	2 (6.56)	490NTW000002U	—
				5 (16.40)	490NTW000005U	—
				12 (39.37)	490NTW000012U	—
				40 (131.23)	490NTW000040U	—
				80 (262.47)	490NTW000080U	—
		1	ruggedized	1 (3.28)	TCSECU3M3M1S4	—
				2 (6.56)	TCSECU3M3M2S4	—
				3 (9.84)	TCSECU3M3M3S4	—
				5 (16.40)	TCSECU3M3M5S4	—
				10 (32.81)	TCSECU3M3M10S4	—

Do it Yourself copper cable and connectors

The **ConneXium** "Do it Yourself" offer consists of 2 connector references (M12 and RJ 45) and 1 cable reference - 300 m (984.25 ft) reel - enabling Ethernet 10/100 Mbps network cables to be made up in situ.

The maximum length of cables made up in this way is 80 m (262.47 ft). They are assembled using only a knife and wire cutters (no special tool is required).

Description	Characteristics	Item	Length m (ft)	Reference	Weight kg
Ethernet copper cable 2 shielded twisted pairs 24 AWG	Conforming to the above-mentioned standards and approvals	2	300 (984.25)	TCSECN300R2	—
RJ 45 connector	Conforms to EIA/TIA-568-D	2	—	TCSEK3MDS	—



TCSESU053FN0

ConneXium unmanaged switches, 3, 4 and 5 ports, twisted pair and optical fiber				
Description	Interfaces	Item	Reference	Weight kg lb
ConneXium switches, unmanaged	3 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors	3	TCSESU033FN0	0.113 0.249
	■ 4 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors ■ 1 x 100BASE-FX port (multimode optical fiber), duplex SC connector	3	TCSESU043F1N0	0.120 0.265
	5 x 10BASE-T/100BASE-TX ports (copper cable), RJ 45 shielded connectors	3	TCSESU053FN0	0.113 0.249

Other wiring components are available, please consult the **ConneXium** offer on our website www.schneider-electric.com

Expansion modules

Compatibility of Modicon TM2 expansion modules with Modicon M221, M221 Book, M241 and M251 logic controllers

Compatibility					
Modicon TM2 expansion modules		Logic controllers			
		M221	M221 Book	M241	M251
Digital modules	TM2DDI8DT				
	TM2DDI16DT				
	TM2DDI16DK				
	TM2DDI32DK				
	TM2DAI8DT				
	TM2DDO8UT				
	TM2DDO8TT				
	TM2DDO16UK				
	TM2DDO16TK				
	TM2DDO32UK				
	TM2DDO32TK				
	TM2DRA8RT				
	TM2DRA16RT				
	TM2DMM8DRT				
	TM2DMM24DRF				
Analog modules	TM2AMI2HT				
	TM2AMI2LT				
	TM2AMI4LT				
	TM2AMI8HT				
	TM2ARI8LRJ				
	TM2ARI8LT				
	TM2ARI8HT				
	TM2AMO1HT				
	TM2AVO2HT				
	TM2AMM3HT				
	TM2ALM3LT				
	TM2AMM6HT				
Expert modules (counter modules)	TM200HSC206DT				
	TM200HSC206DF				

Compatible

Not compatible

Note: The TWD..... range of expansion and communication modules is not compatible with the Modicon M221/M221 Book/M241/M251 logic controller offer.

Configuration

- Modicon TM3 expansion modules are powered by logic controllers via the bus connector on the side of the products. This connector delivers 2 voltages, 5 V and 24 V. For the Modicon M221 and M221 Book logic controllers, you should therefore calculate the total TM3 expansion module consumption and check that it is definitely compatible with the maximum current delivered by the controller. This information is available on each product data sheet or in the hardware reference guide. This can be checked very quickly in the SoMachine Basic programming software setup page.
- For Modicon M241 and M251 logic controllers, up to 7 TM2 expansion modules can be attached regardless of these module references.

4		TM221M16T	19
490NTW00002	31	TM221M16TG	19
490NTW00002U	31	TM221M32TK	19
490NTW00005	31	TM221ME16R	19
490NTW00005U	31	TM221ME16RG	19
490NTW00012	31	TM221ME16T	19
490NTW00012U	31	TM221ME16TG	19
490NTW00040	31	TM221ME32TK	19
490NTW00040U	31	TMACBL1	21
490NTW00080	31	TMAHOL02	20
490NTW00080U	31	TMAM2	20
		TMASD1	20
A		TMAT2CSET	20
A9A15151	20	TMAT2MSET	20
		TMAT2MSETG	20
B		TMAT2PSET	20
BMXXCAUSBH018	21	TMC2AI2	18
		TMC2AQ2C	18
D		TMC2AQ2V	18
DX1AP52	20	TMC2CONV01	18
		TMC2HOIS01	18
L		TMC2PACK01	18
LU9GC3	23	TMC2SL1	18
		TMC2TI2	18
T		TMH2GDB	20
TCSECE3M3M1S4	31	TSXCSA100	23
TCSECE3M3M2S4	31	TSXCSA200	23
TCSECE3M3M3S4	31	TSXCSA500	23
TCSECE3M3M5S4	31	TSXSACA50	23
TCSECE3M3M10S4	31	TWDXCAFJ010	23
TCSECN300R2	31	TWDXCAISO	23
TCSECU3M3M1S4	31	TWDXCAT3RJ	23
TCSECU3M3M2S4	31		
TCSECU3M3M3S4	31	V	
TCSECU3M3M5S4	31	VW3A1104R10	20
TCSECU3M3M10S4	31	VW3A8306D30	23
TCSEK3MDS	31	VW3A8306R03	23
TCSESU033FN0	31	VW3A8306R10	23
TCSESU043F1N0	31	VW3A8306R30	23
TCSESU053FN0	31	VW3A8306RC	23
TCSMCN3M4F3C2	23	VW3A8306TF03	23
TCSMCN3M4M3S2	23	VW3A8306TF10	23
TCSXCNAMUM3P	21		
TM221C16R	18	X	
TM221C16T	18	XBTZ938	23
TM221C16U	18	XBTZ9008	23
TM221C24R	18	XBTZ9980	20
TM221C24T	18		23
TM221C24U	18	XBTZ9982	23
TM221C40R	18	XGSZ24	23
TM221C40T	18		
TM221C40U	18	Z	
TM221CE16R	18	ZB5AZ905	20
TM221CE16T	18		
TM221CE16U	18		
TM221CE24R	18		
TM221CE24T	18		
TM221CE24U	18		
TM221CE40R	18		
TM221CE40T	18		
TM221CE40U	18		
TM221M16R	19		
TM221M16RG	19		

The Next Generation



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

www.schneider-electric.com/msx